


Technical data


- Nominal voltage: 300V/14A(IEC 250V/12A)
PITCH:5.0mm
- Insulation Withstands Voltage:
AC 1600V/MIN/ AC 2500V/MIN
- Insulation Resistance:
1000M Ω or more at DC500V
- Using temperature range:-40C°~115C°
Soldering temperature:250 \pm 10C°/5s

5.Undimentioned Tolerances:

Dim L=P*5.0 Dim B=(P-1)*5.0 P = number of poles(2-24p)	Dim B	Dim L
0-30mm	± 0.15	± 0.20
over 30mm-60mm	± 0.20	± 0.25
over 60mm-90mm	± 0.25	± 0.30
over 90mm	± 0.35	± 0.40

6.Safety approval: 

7.RoHS Compliance 




8.Critical dimension: 

GAVA500 $\times \times \times$ 00K

① Poles 02-24

② Color


0 Black

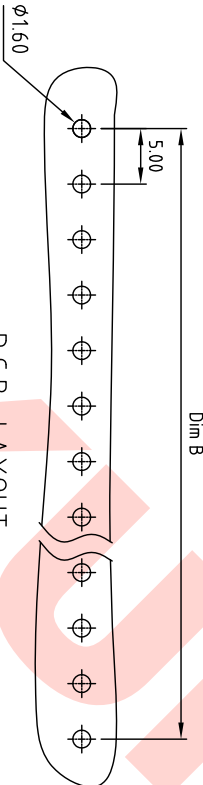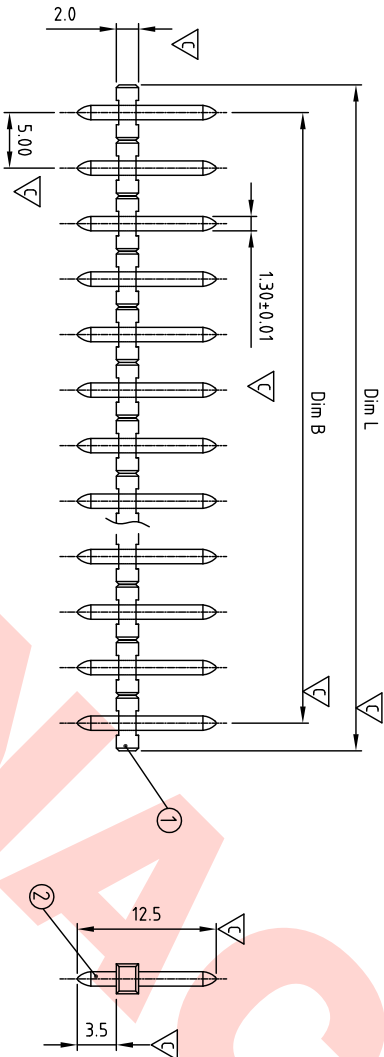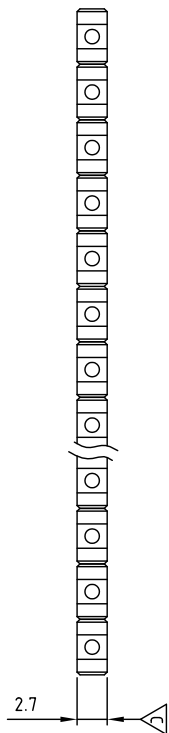

ITEM	NAME OF PART	MATERIAL	NOTES	QTY
2	CAGE	BRASS	TIN PLATED	P
1	BODY	PA66 UL94V-0	BLACK	1

DWG	WF. Zhang	DATE	2016.03.10	UNITS	MM	SHEET	1 OF 1	Tolerance
CHK.	WF. Zhang	DATE	2016.03.10	SCALE:	NONE 2:1 (.)	REV.	A	X, X X, X X, X X, X
APP.	Marvin Zhang	DATE	2016.03.31	TITLE:	GA-VA500 Series 180D			± 0.50 ± 0.30 ± 0.10
				PART NO.:	GAVVA500xxxx00K			X ⁺
				DWG NO.:	GA-V500-B001			$\pm 1^{\circ}$

SIGN	DESCRIPTION	CHK.	DATE
			

 KUNIA Contact Technology Co, Ltd
<http://www.kunicon.com>