


Technical data

- 1 Nominal voltage: 300V/8A  
PITCH: 3.81mm
- 2 Insulation Withstands Voltage:  
AC 1600V/MIN
- 3 Insulation Resistance:  
1000M $\Omega$  or more at DC500V
- 4 Using temperature range: -40 $^{\circ}$ C ~ 115 $^{\circ}$ C
- 5 Soldering temperature range: 250 $^{\circ}$ C  $\pm$  10 $^{\circ}$ C / 5sec
- 6 Safety approval:
- 7 RoHS Compliance
- 8 Critical dimension:
- 9 Undimensioned Tolerances:

Dimension	Dim B	Dim L
0-30mm	$\pm 0.15$	$\pm 0.20$
over 30mm-60mm	$\pm 0.20$	$\pm 0.25$
over 60mm-90mm	$\pm 0.25$	$\pm 0.30$
over 90mm	$\pm 0.30$	$\pm 0.40$

HAFV381 XX X XXX

- ① Poles 04-4(8)2 $\times$ 2p-2 $\times$ 24p)
- ② Color
- 0 Black 3 Orange 5 Green 6 Blue:....
- ③ Custom
- 000 K MARK 00K KUNACON MARK

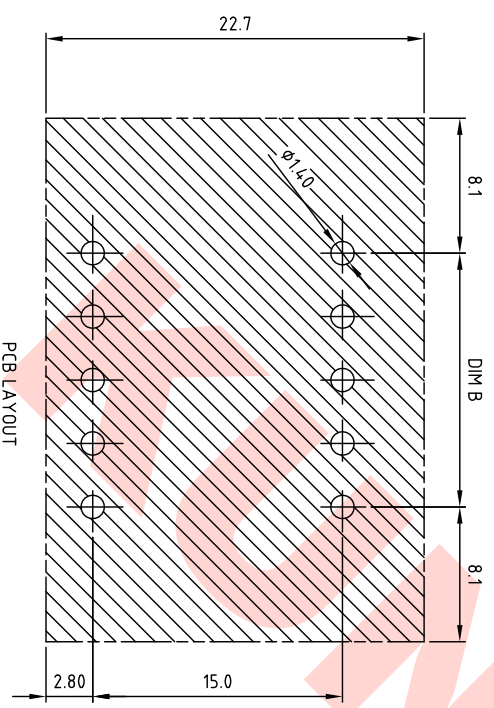

ITEM	NAME OF PART	MATERIAL	NOTES	QTY
3	PIN	BRASS	TIN PLATED	P
2	COVER	PA66 UL94V-0		1
1	BODY	PA66 UL94V-0		1

DWG. W/F.	DATE	UNITS	SHEET	1 OF 1	Tolerance
CHK. W/F. Zhang	DATE 2016.03.10	SCALE: NONE 3:1 (.)	REV. A		$\pm 0.50$
APP. Marvin Zhang	DATE 2016.03.31	TITLE: HA-FV381 Series W/F type			$\pm 0.30$
		Vertical (180D)			$\pm 0.10$

PART NO.	DWG NO.	DESCRIPTION	CHK.	DATE	SIGN.
HAFV381XXXXXX	HA-F381-B002				

