


Transfer or duplication of this document as well as the utilisation or communication of its content are not permitted unless express consent is granted. Violations give rise to claims for damages. All rights reserved in case of patent, utility model or design patent registrations.

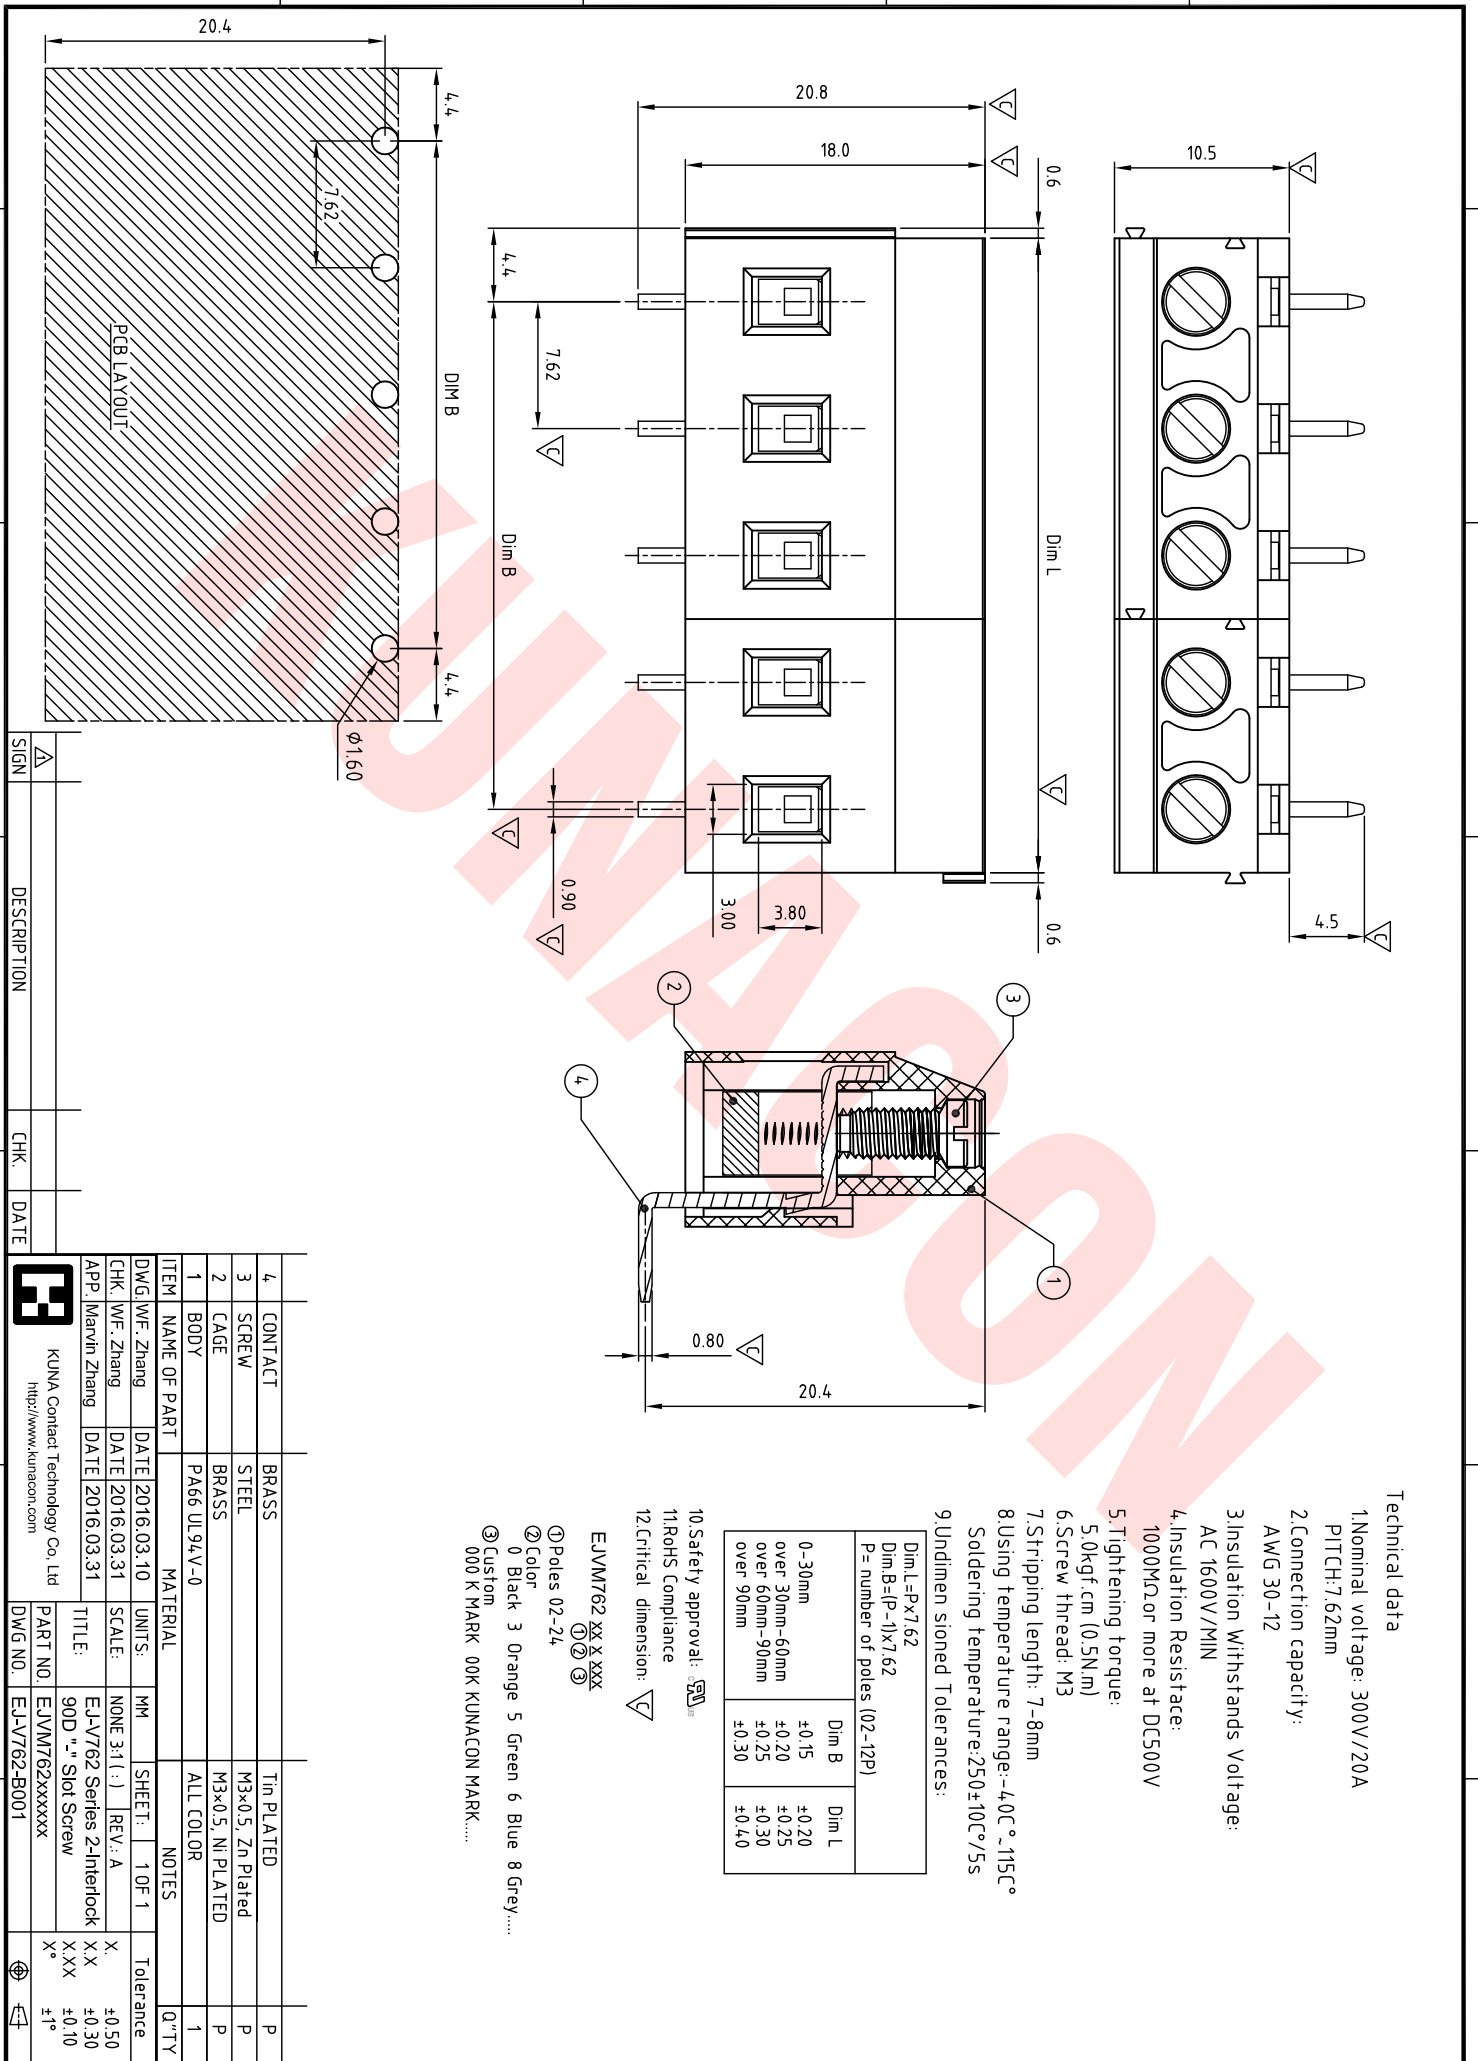

Technical data

- 1.Nominal voltage: 300V/20A  
PITCH:7.62mm
- 2.Connection capacity:  
AWG 30-12

- 3.Insulation Withstands Voltage:  
AC 1600V/MIN

- 4.Insulation Resistance:  
1000M $\Omega$  or more at DC500V

- 5.Tightening torque:  
5.0kgf cm (0.5Nm)

- 6.Screw thread: M3

- 7.Stripping length: 7-8mm

- 8.Using temperature range:-40C ~115C°  
Soldering temperature:250 $\pm$ 10C°/5s

- 9.Undimentioned Tolerances:

Dim L=P $\times$ 7.62	Dim B	Dim L
Dim B=(P-1) $\times$ 7.62	0-30mm	$\pm$ 0.15
P= number of poles (02-12P)	over 30mm-60mm	$\pm$ 0.20
	over 60mm-90mm	$\pm$ 0.25
	over 90mm	$\pm$ 0.30
		$\pm$ 0.40

- 10.Safety approval:
- 11.RoHS Compliance
- 12.Critical dimension:

- EJVM762-XX X XXX
- ① Poles 02-24
- ② Color  
0 Black 3 Orange 5 Green 6 Blue 8 Grey.....
- ③ Custom  
000 K MARK 00K KUNACON MARK.....

4	CONTACT	BRASS	Tin PLATED	P
3	SCREW	STEEL	M3 $\times$ 0.5, Zn Plated	P
2	CAGE	BRASS	M3 $\times$ 0.5, Ni PLATED	P
1	BODY	PA66 UL94V-0	ALL COLOR	1

ITEM	NAME OF PART	MATERIAL	NOTES
DWG	WF. Zhang	DATE	2016.03.10
CHK	WF. Zhang	DATE	2016.03.31
APP	Marvin Zhang	DATE	2016.03.31
TITLE	EJ-V762 Series 2-Interlock		
PART NO.	EJVM762xxxxxx		
DWG NO.	EJ-V762-B001		

UNITS:	MM	SHEET:	1 OF 1	Tolerance
SCALE:	NONE 3:1 (.)	REV.:	A	$\pm$ 0.50
				$\pm$ 0.30
				$\pm$ 0.10
				$\pm$ 1°

APPROVAL	DATE	DESCRIPTION

DATE	CHK.	DESCRIPTION	SIGN

KUNACON Technology Co. Ltd  
http://www.kunacon.com