


Technical data

- 1.Nominal voltage: 300V/15A
PITCH:5.08mm
- 2.Connection capacity:
AWG 30-12
- 3.Insulation Withstands Voltage:
AC 1600V/MIN
- 4.Insulation Resistance:
1000M Ω or more at DC500V
- 5.Tightening torque:
4.3Lb-in (0.5Nm/5.0kgf.cm)
- 6.Screw thread: M3
- 7.Stripping length: 7-8mm
- 8.Using temperature range:-40C \circ -115C \circ
- 9.Undimensioned Tolerances:

Dim.L=P \times 5.08	Dim B	Dim L
Dim.B=(P-1) \times 5.08	± 0.15	± 0.20
Dim.C=P \times 5.08 ± 0.2	over 30mm-60mm	± 0.25
P= number of poles	over 60mm-90mm	± 0.30
	over 90mm	± 0.40

10.Safety approval: 

11.RoHS Compliance





12.Critical dimension: 

MEFO508 $\times \times \times$ $\times \times \times$

① Poles 02-24

② Color
0 Black 3 Orange 5 Green 6 Blue.....

③ Custom
000 K MARK 00K KUNACON MARK.....

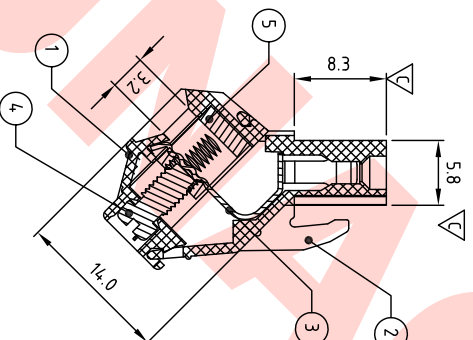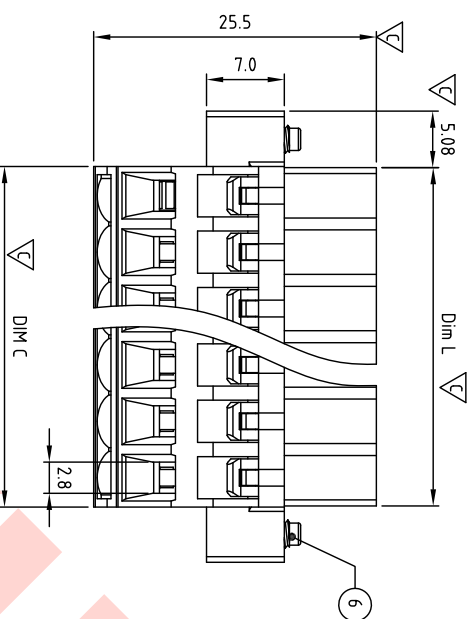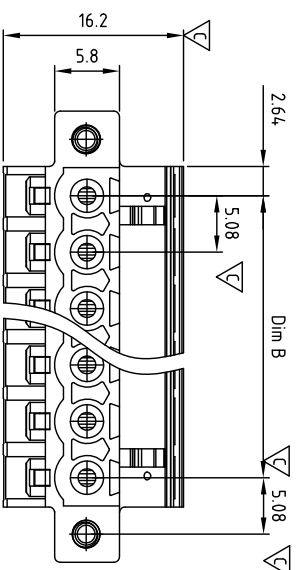

△	SIGN	DESCRIPTION	CHK.	DATE
---	------	-------------	------	------

6	FLANGE SCREW	STEEL	M2.5 \times 0.45, Zn PLATED	2
5	CAGE	BRASS	M3 0 \times 0.5, Ni PLATED	P
4	SCREW	STEEL	M3 0 \times 0.5, Zn Plated	P
3	WIRE GUARD	BRONZE (PbZ)	TIN PLATED	P
2	COVER	PA66 UL94V-0	ALL COLOR	1
1	BODY	PA66 UL94V-0	ALL COLOR	1

DWG	Marvin Zhang	DATE	2016.03.10	UNITS	MM	SHEET	1 OF 1	Tolerance
CHK.	Marvin Zhang	DATE	2016.03.30	SCALE	NONE 2.5:1 (.)	REV.	A	± 0.50
APP.	Marvin Zhang	DATE	2016.03.30	TITLE	ME-F0508 Series " " slot			
				PART NO.	MEFO508xxxxxx			
				DWG NO.	ME-F508-B001			



KUNACON Contact Technology Co., Ltd
http://www.kunacon.com

