


Technical data


- 1 Nominal voltage: 300V/8A
PITCH:3.5mm
- 2 Insulation Withstands Voltage:
AC1600V/MIN
- 3 Insulation Resistance:
1000MΩ or more at DC500V
- 4 Using temperature range:-40°C ~115°C
- 5 Soldering temperature range:260°C±5°C /10sec
- 6 Safety approval:
- 7 RoHS Compliance
- 8 Critical dimension:
- 9 Undimentioned Tolerances:

	Dim B	Dim L
0-30mm	±0.15	±0.20
over 30mm-60mm	±0.20	±0.25
over 60mm-90mm	±0.25	±0.30
over 90mm	±0.30	±0.40

- HACH350 xx x Lxx
 ① Poles 02-24
 ② Color
 0 Black
 ③ Custom
 L00 K MARK LOK KUNACON MARK....

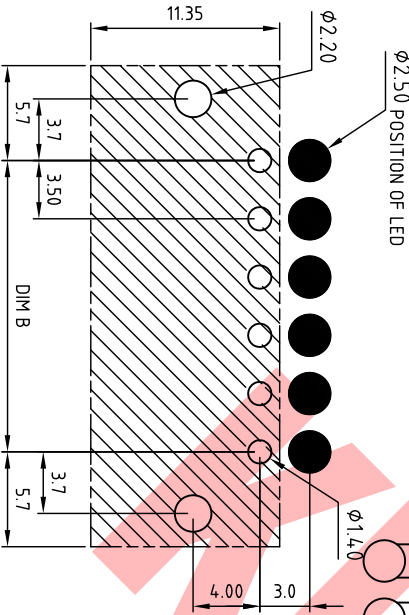


RECOMMENDED PCB LAYOUT

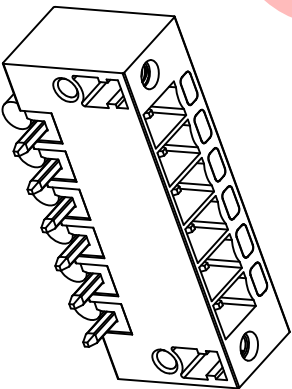

△	SIGN	DESCRIPTION	CHK	DATE

4	FLANGE NUT	BRASS	M2.0	2					
3	PIN	COOPER	TIN PLATED	P					
2	Light guide	PC UL94V-0		P					
1	BODY	PA6T UL94V-0	BLACK	1					
ITEM NAME OF PART		MATERIAL							
DWG	WF. Zhang	DATE	2018.01.31	UNITS	MM	SHEET:	1 OF 1	Tolerance	±0.50
CHK	WF. Zhang	DATE	2018.01.31	SCALE:	NONE 4:1 (:)	REV:	A		±0.30
APP.		DATE		TITLE:	HA-CH350 Series W/F type Right-angle(90D) Light guide				
PART NO.		HACH350xxxLxx							
DWG NO.		HA-C350-B202							
								Tolerance	
								±0.10	
								±1°	



KUNA Contact Technology Co., Ltd
<http://www.kunacon.com>