
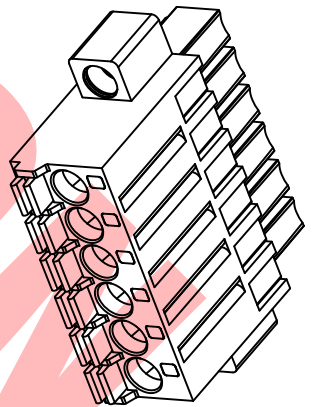
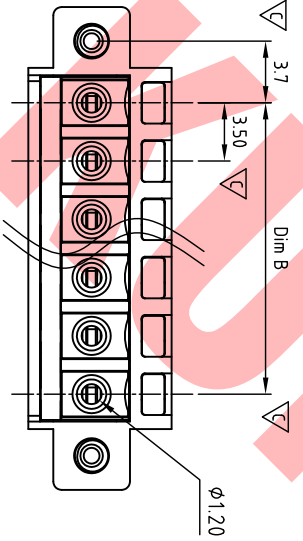
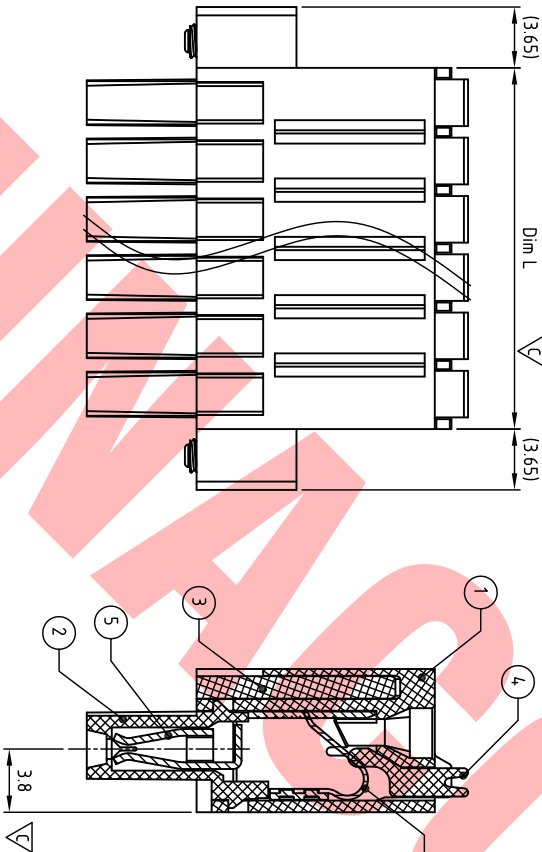
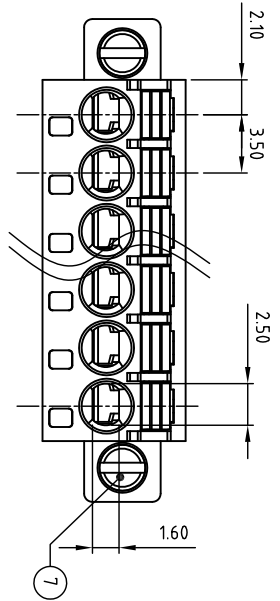


Transfer or duplication of this document as well as the utilisation or communication of its content are not permitted unless express consent is granted. Violations give rise to claims for damages. All rights reserved in case of patent, utility model or design patent registrations.

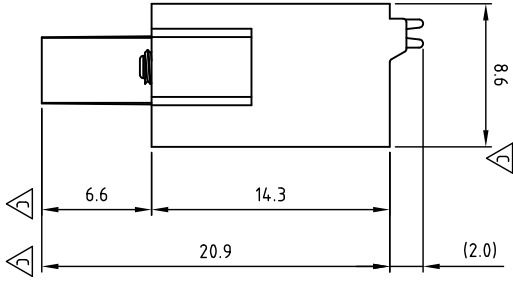

Technical data

- 1.Nominal voltage: 150V/8A
- PITCH:3.5mm
- 2.Connection capacity: AWG 24-16
- 3.Insulation Withstands Voltage: AC 1300V/MIN
- 4.Insulation Resistance: 1000M Ω or more at DC500V
- 5.Stripping length: 9-10mm
- 6.Using temperature range:-40C ~+15C
- 7.Undimensioned Tolerances:

Dim L=P \times 3.5+4.2	Dim B	Dim L
Dim B=(P-1) \times 3.5	0-30mm over 30mm-60mm over 60mm-90mm over 90mm	± 0.15 ± 0.20 ± 0.25 ± 0.30
P = number of poles(02-24)		± 0.20 ± 0.25 ± 0.30 ± 0.40

- 8.Safety approval:
 - 9.RoHS Compliance
 - 10.Critical dimension:
- PBFD350 $\times \times \times$ LXX
 ① Poles 2-24
 ② Color
 0 Black 3 Orange 5 Green 6 Blue G Pale grey.....
 ③ Custom
 100 K MARK LOK KUNACON MARK.....

7	FLANGE	STEEL C1018	PLATED ZN	2
6	WIRE GUARD	Stainless steel		P
5	CONTACT	BRONZE (PbBz)	TIN PLATED	P
4	LEVEL	PBT UL94V-0	ORANGE	P
3	Light guide	PC UL94V-0	TRANSPARENT	P
2	DOWN BODY	PA66 UL94V-0	ALL COLOR	1
1	UP BODY	PA66 UL94V-0	ALL COLOR	1

DWG. WF. Zhang		DATE	2018.04.19	UNITS:	MM	SHEET:	1 OF 1	Tolerance
CHK. WF. Zhang		DATE	2018.04.19	SCALE:	NONE 3:1 (.)	REV.:	A	± 0.50 ± 0.30 ± 0.10
APP.	DATE							
TITLE:		PB-FD350 Series with Screw X.X						
PART NO.		PBFD350xxxLxx						
DWG NO.		PB-F350-B201						

SIGN	DESCRIPTION	CHK.	DATE



KUNA Contact Technology Co., Ltd
<http://www.kunacon.com>

