


Transfer or duplication of this document as well as the utilisation or communication of its content are not permitted unless express consent is granted. Violations give rise to claims for damages. All rights reserved in case of patent, utility model or design patent registrations.

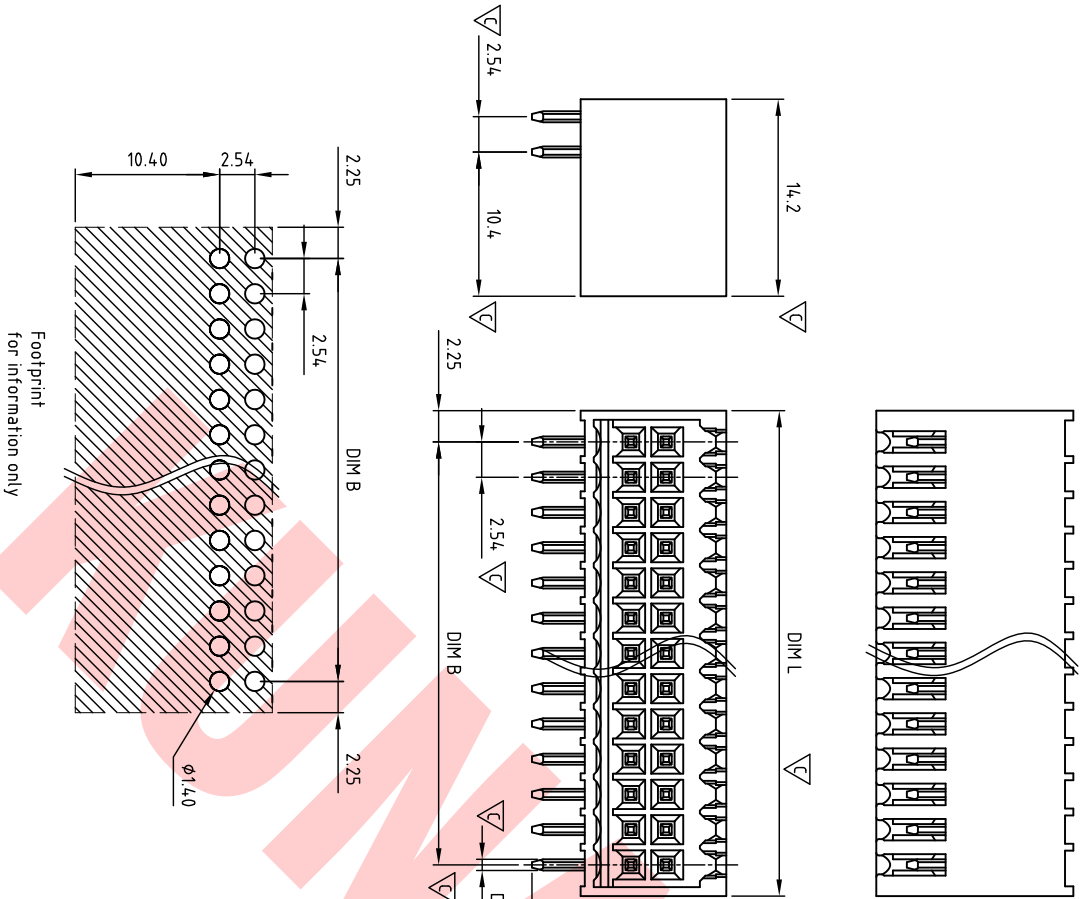

Technical data

1. Nominal voltage: 150V/5A
- PITCH: 2.54mm
2. Insulation Withstanding Voltage: AC 1300V/MIN
3. Insulation Resistance: 1000M Ω or more at DC500V
4. Using temperature range: -40C $^{\circ}$ -115C $^{\circ}$
- Soldering temperature: 250 \pm 5C $^{\circ}$ /110s
5. Undimensioned Tolerances:

Dim L=(P-1) \times 2.54+4.5	Dim B	Dim L
Dim B=(P-1) \times 2.54	± 0.15	± 0.20
P=1/2 Number of poles (04-48P)	over 30mm-60mm	± 0.25
	over 60mm-90mm	± 0.30
	over 90mm	± 0.40

6. Safety approval:
 7. RoHS Compliance
 8. Critical dimension: ∇
- HGBH254 xx x 0xx
 ① Poles 04-48(2 \times 02-2 \times 24)
 ② Color
 0 Black 5 Green 6 Blue 8 Dark gray....
 ③ Custom
 000 K MARK 00K KUNACON MARK

3	PIN	COPPER	TIN PLATED	1/2P
2	PIN	COPPER	TIN PLATED	1/2P
1	BODY	PA66 UL94V-0	ALL COLOR	1
ITEM NAME OF PART		MATERIAL NOTES		
DWG. WF. Zhang	DATE 2020.08.27	MM	SHEET: 1 OF 1	Tolerance
CHK. WF. Zhang	DATE 2020.08.27	SCALE: NONE 2.5:1 (.)	REV.: A	± 0.50
APP.	DATE	TITLE: HG-BH254-90D Series CloseX		± 0.30
		type P3.5		± 0.10
		PART NO. HGBH254xxxxxx		X $^{\circ}$
		DWG NO. HG-BH254-B001		X $^{\circ}$

REV	SIGN	DESCRIPTION	CHK	DATE
A				

KUNA Contact Technology Co., Ltd
<http://www.kunacon.com>