

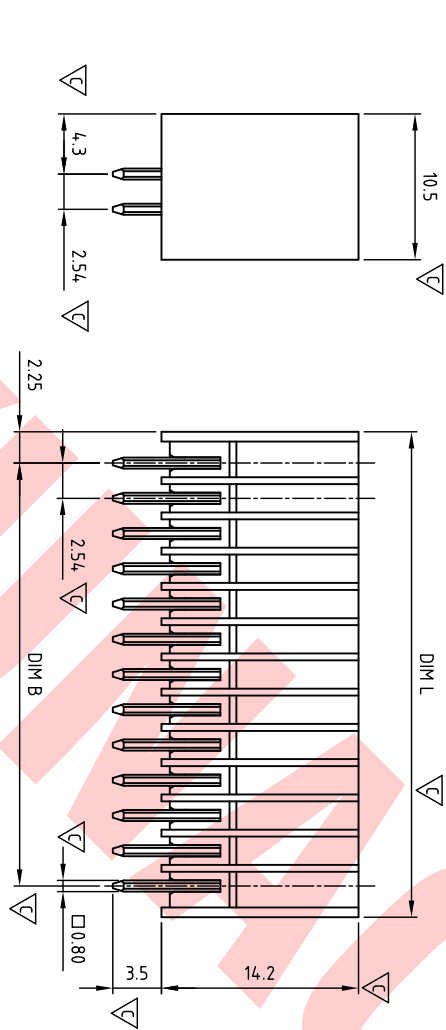
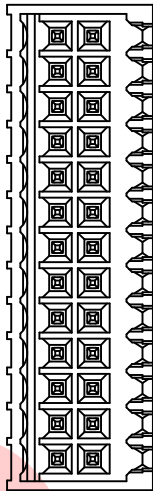


Transfer or duplication of this document as well as the utilisation or communication of its content are not permitted unless express consent is granted. Violations give rise to claims for damages. All rights reserved in case of patent, utility model or design patent registrations.

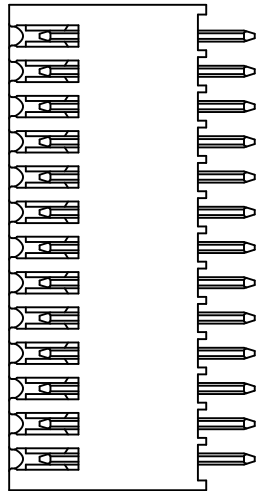

Technical data

1. Nominal voltage: 150V/5A
- PITCH: 2.54mm
2. Insulation Withstanding Voltage: AC 1300V/MIN
3. Insulation Resistance: 1000MΩ or more at DC500V
4. Using temperature range: -40C°~+115C°
- Soldering temperature: 250±5C°/110s
5. Undimensioned Tolerances:


Dim L (P-1) x 2.54 + 4.5	Dim B	Dim L
Dim B (P-1) x 2.54	±0.15	±0.20
P = 1/2 Number of poles (04~48P)	over 30mm ±0.20	±0.25
	over 60mm ±0.30	±0.30
	over 90mm ±0.30	±0.40

6. Safety approval:

7. RoHS Compliance

8. Critical dimension:  $\nabla$

- HGBV254 xx X 0xx  
 ① Poles 04~48 (2~02-2\*24)  
 ② Color  
 0 Black 5 Green 6 Blue 8 Dark gray....  
 ③ Custom  
 000 K MARK 00K KUNACON MARK

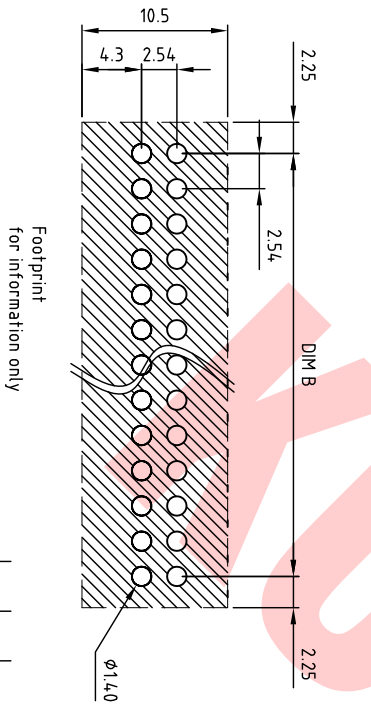

REV	△	DESCRIPTION	CHK	DATE								
2												
1												
<table border="1"> <tr> <td>ITEM</td> <td>NAME OF PART</td> <td>MATERIAL</td> <td>NOTES</td> </tr> <tr> <td>1</td> <td>BODY</td> <td>COPPER PA66 UL94V-0</td> <td>TIN PLATED ALL COLOR</td> </tr> </table>					ITEM	NAME OF PART	MATERIAL	NOTES	1	BODY	COPPER PA66 UL94V-0	TIN PLATED ALL COLOR
ITEM	NAME OF PART	MATERIAL	NOTES									
1	BODY	COPPER PA66 UL94V-0	TIN PLATED ALL COLOR									
DWG	WF. Zhang	DATE	2020.08.27	UNITS	MM	SHEET	1 OF 1	Tolerance				
CHK	WF. Zhang	DATE	2020.08.27	SCALE	NONE 2.5:1 (.)	REV	A	±0.50 ±0.30 ±0.10				
APP		DATE		TITLE	HG-BV254-180D Series Close type P3.5			±1°				
KUNA Contact Technology Co., Ltd <a href="http://www.kunacon.com">http://www.kunacon.com</a>												
PART NO. HGBV254XXXXXX DWG NO. HG-BV254-B001												