

Technical data

1. Nominal voltage: 150V/5A  
PITCH: 2.54mm
2. Insulation Withstanding Voltage:  
AC 1300V/MIN
3. Insulation Resistance:  
1000MΩ or more at DC500V
4. Using temperature range: -40°C ~ 115°C  
Soldering temperature: 250±5°C / 10s
5. Undimensioned Tolerances:


Dim L = (P-1) × 2.54 + 10.1	Dim B	Dim L
Dim B = (P-1) × 2.54	±0.15	±0.20
P = 1/2 Number of poles (04-48P)	over 30mm-60mm	±0.20
	over 60mm-90mm	±0.25
	over 90mm	±0.30
		±0.40


6. Safety approval:

7. RoHS Compliance

8. Critical dimension:

- HGCV254 xx x 0xx
- ① Poles 04-48 (2-2x24)
- ② Color
- ③ Custom
- 0 Black 5 Green 6 Blue 8 Dark gray....
- 000 K MARK 00K KUNACON MARK

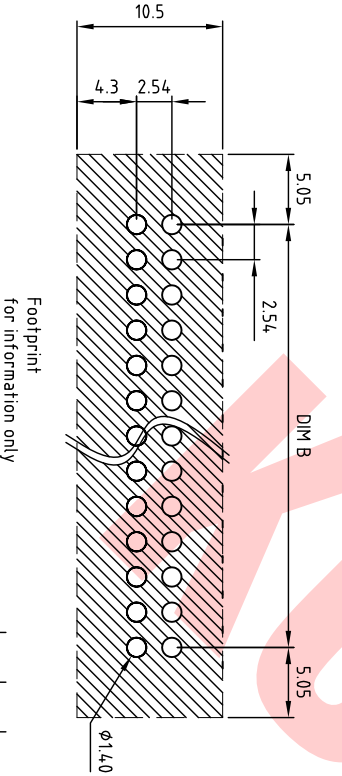

REV	Δ	DESCRIPTION	CHK	DATE
 KUNA Contact Technology Co., Ltd <a href="http://www.kunacon.com">http://www.kunacon.com</a>				
ITEM	NAME OF PART	MATERIAL	NOTES	Q'TY
4	FLANGE NUT	BRASS		2
3	PIN	COPPER	0.8×0.8 TIN PLATED	P
2	BODY	PA66 UL94V-0	ALL COLOR	1
DWG. WF. Zhang DATE 2020.08.27 UNITS: MM SHEET: 1 OF 1 Tolerance				
CHK. WF. Zhang DATE 2021.01.15 SCALE: NONE 2.5:1 (.) REV: A ±0.50				
TITLE: HG-CV254-180D Series X.X ±0.30				
APP. DATE W/F type P3.5 XXX ±0.10				
PART NO. HGCV254xxxxxx X*				
DWG NO. HG-CV254-B001 ±1*				