


Technical data

1. Nominal voltage: 150V/8A
PITCH: 3.5mm
2. Insulation Withstanding Voltage:
AC 1300V/MIN
3. Insulation Resistance:
1000MΩ or more at DC500V
4. Using temperature range: -40°C~115°C
Soldering temperature: 260±5°C/10s
5. Undimentioned Tolerances:

Dim. L: L(P-1)X3.5+10.5	Dim. L	±0.20	±0.30
Dim. B: B(P-1)X3.5	Dim. B	±0.20	±0.25
P=1/2 Number of poles (04~48P)	Dim B	±0.25	±0.30
0~30mm	Dim L	±0.30	±0.40
over 30mm~60mm			
over 60mm~90mm			
over 90mm			

- △ 6 Safety approval:
- 7. RoHS Compliance
- 8. Critical dimension:

HGCH350-xx X xxx
 ① Poles 04~48(2x02~2x24)
 ② Color
 ③ Custom
 000 K MARK 00K KUNACON MARK

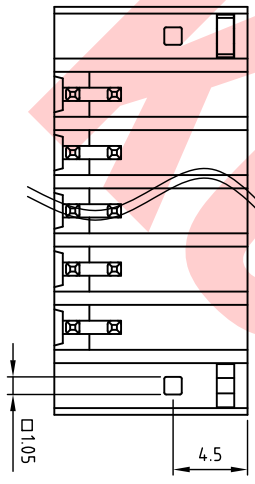

4	FLANGE NUT	BRASS			2
3	PIN	COPPER			1/2P
2	PIN	COPPER			1/2P
1	BODY	LCP UL94V-0	BLACK		1

ITEM	NAME OF PART	MATERIAL	NOTES
DWG.	WF. Zhang	DATE	2019.07.16
CHK.	WF. Zhang	DATE	2019.07.16
APP.		DATE	
TITLE:	HG-CH350 Series W/F type		
PART NO.	HGCH350xxxxxx		
DWG NO.	HG-CH350-B001		
SCALE:	NONE 2.5:1 (.)	REV.:	B
SHEET:	1 OF 1	Tolerance	
UNITS:	MM		
			±0.50
			±0.30
			±0.10
			±1°

REV	SIGN	DESCRIPTION	CHK.	DATE
B	△	Add UL Safety approval.	WF. Z	7/16/19



KUNA Contact Technology Co. Ltd
<http://www.kunacon.com>