
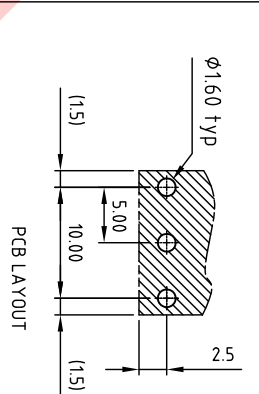

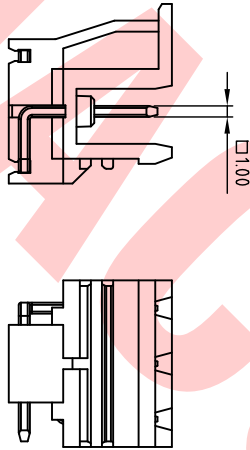

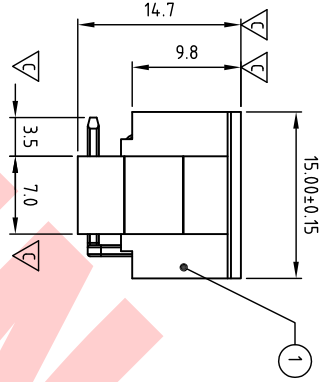



Transfer or duplication of this document as well as the utilisation or communication of its content are not permitted unless express consent is granted. Violations give rise to claims for damages. All rights reserved in case of patent, utility model or design patent registrations.



Technical data

- 1.Nominal voltage: 300V/15A
PITCH:5.00mm
 - 2.Insulation Withstands Voltage:
AC 1600V/MIN
 - 3.Insulation Resistace:
1000MΩ or more at DC500V
 - 4.Using temperature range:-40°C ~115°C
 - 5.Soldering temperature range:250C±10C/5sec
 - 6.Safety approval:
 - 7.RoHS Compliance
 - 8.Critical dimension:
- HDAL50003 x xxx
 ① Color
 0 Black 3 Orange 5 Green 6 Blue.....
 ② Custom
 000 K MARK 00K KUNACON MARK.....

APPROVAL	DATE	DESCRIPTION	DATE	CHK.	DATE
△					
SIGN					
DESCRIPTION					
CHK.					
DATE					
KUNA Contact Technology Co., Ltd http://www.kunacon.com					
ITEM	NAME OF PART	MATERIAL	NOTES	QTY	
4	PIN-03	COPPER		1	
3	PIN-02	COPPER		1	
2	PIN-01	COPPER		1	
1	BODY	PA66 UL94V-0		1	
DWG.	Marvin Zhang	DATE	2017.10.16	UNITS:	MM
CHK.	Marvin Zhang	DATE	2017.10.16	SCALE:	NONE 2:1 (.)
APP.		DATE		REV.:	A
TITLE: HD-AL500 Series 3P Header X.X					
PART NO.: HDAL50003XXXX					
DWG NO.: HD-AL500-B002					
				Tolerance	
				±0.50	
				±0.30	
				±0.10	
				±1°	