
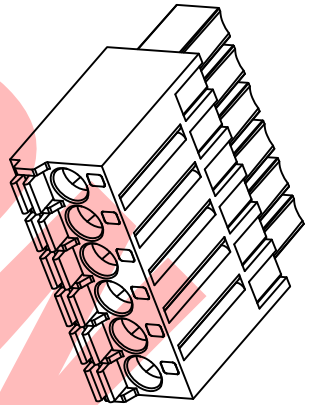
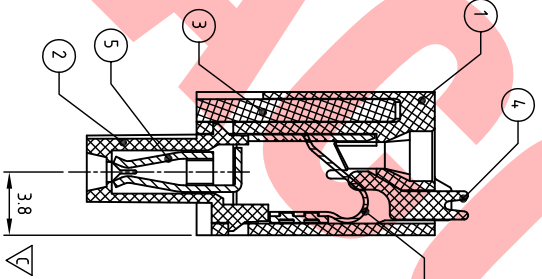
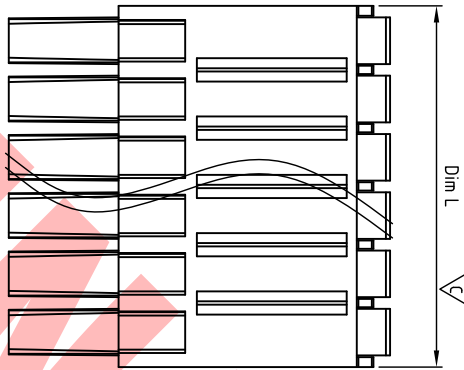
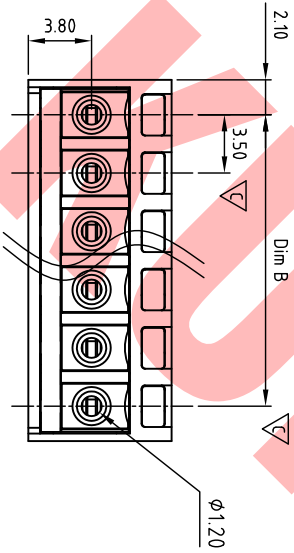
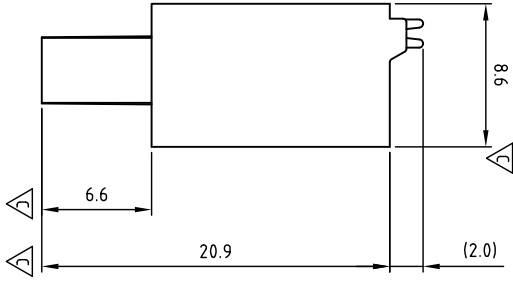


Transfer or duplication of this document as well as the utilisation or communication of its content are not permitted unless express consent is granted. Violations give rise to claims for damages. All rights reserved in case of patent, utility model or design patent registrations.

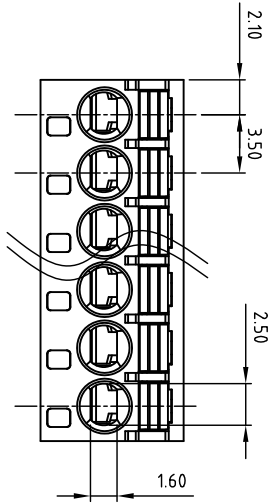

Technical data

- 1.Nominal voltage: 150V/8A
- PITCH:3.5mm
- 2.Connection capacity: AWG 24-16
- 3.Insulation Withstands Voltage: AC 1300V/MIN
- 4.Insulation Resistance: 1000M Ω or more at DC500V
- 5.Stripping length: 9-10mm
- 6.Using temperature range:-40C ~+15C
- 7.Undimensioned Tolerances:

Dim L=P \times 3.5+4.2	Dim B	Dim L
Dim B=(P-1) \times 3.5	0-30mm	± 0.15
P = number of poles(02-24)	over 30mm-60mm	± 0.20
	over 60mm-90mm	± 0.25
	over 90mm	± 0.30
		± 0.40

- 8.Safety approval:
- 9.RoHS Compliance
- 10.Critical dimension:
- PB350 xxx X Lxx
- ① Poles 2-24
- ② Color
- ③ 0 Black 3 Orange 5 Green 6 Blue G Pale grey.....
- ④ Custom
- ⑤ 100 K MARK LOK KUNACON MARK.....

7	WIRE GUARD	Stainless steel	TIN PLATED	P
6	CONTACT	BRONZE (PbZ)	ORANGE	P
4	LEVEL	PBT UL94V-0	TRANSPARENT	P
3	Light guide	PC UL94V-0	ALL COLOR	1
2	DOWN BODY	PA66 UL94V-0	ALL COLOR	1
1	UP BODY	PA66 UL94V-0	ALL COLOR	1

DWG.	WF. Zhang	DATE	2018.04.19	UNITS:	MM	SHEET:	1 OF 1	Tolerance	
CHK.	WF. Zhang	DATE	2018.04.19	SCALE:	NONE 3:1()	REV.:	A	± 0.50	
APP.		DATE		TITLE:	PB-SD350 Series W/o Screw				± 0.30
					flange Light guide type				± 0.10
				PART NO.	PB350xxxLxx				$\pm 1^{\circ}$
				DWG NO.	PB-S350-B201				

SIGN _____ DATE _____

DESCRIPTION _____

CHK _____



KUNA Contact Technology Co. Ltd
http://www.kunacon.com