
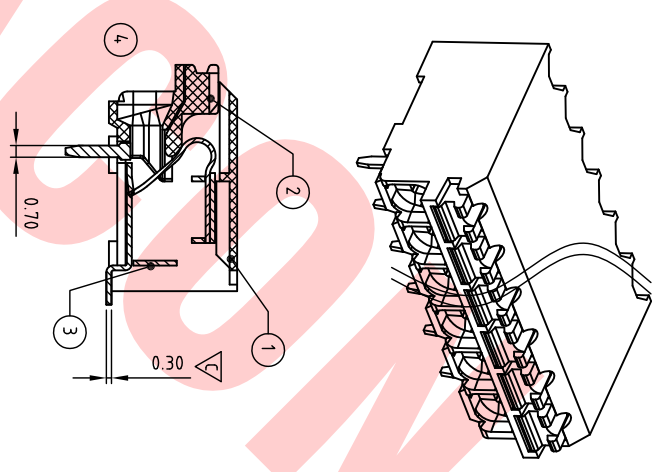
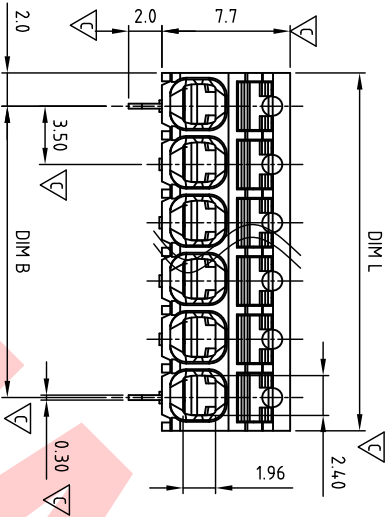
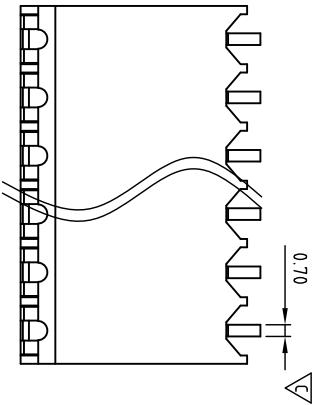


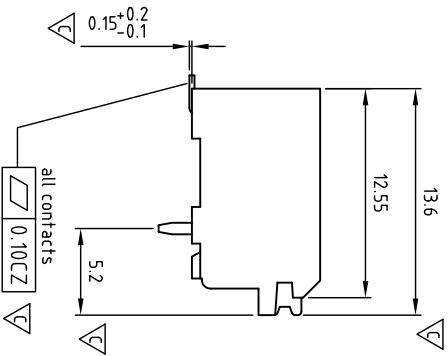

Technical data

- 1.Nominal voltage: 300V/10A (IEC 160V/13.5A)
- 2.Connection capacity:
AWG 24-16 / 0.2-1.5mm²
Cable end sleeve: A 0.75mm²(18AWG)-10mm diameter ϕ 1.5mm
3. Insulation Withstanding Voltage:
AC 1600V/MIN
4. Insulation Resistance:
1000M Ω or more at DC500V
5. Stripping length: 8.5-9mm
6. Using temperature range: -40C° -130C°
Soldering temperature: 270 $\pm$ 5C°/10s

7.Undimen sioned Tolerances:

Dim L=P $\times$ 3.5 $\pm$ 4.0 Dim B=P-1 $\times$ 3.5 P= number of poles(2-24P)	Dim B	Dim L
0-30mm	$\pm$ 0.15	$\pm$ 0.20
over 30mm-60mm	$\pm$ 0.20	$\pm$ 0.25
over 60mm-90mm	$\pm$ 0.25	$\pm$ 0.30
over 90mm	$\pm$ 0.30	$\pm$ 0.40

8.Safety approval:

9.RoHS Compliance

10.Critical dimension

SEHO350 xx X 1XC

①②③

① Poles 01-24



② Color

③ Cust No.

0 Black

10C BOX PACKING

1RC 1&R PACKING

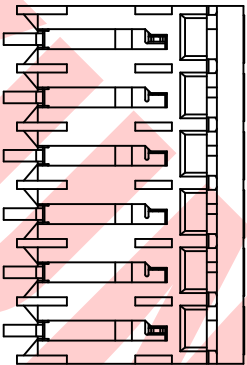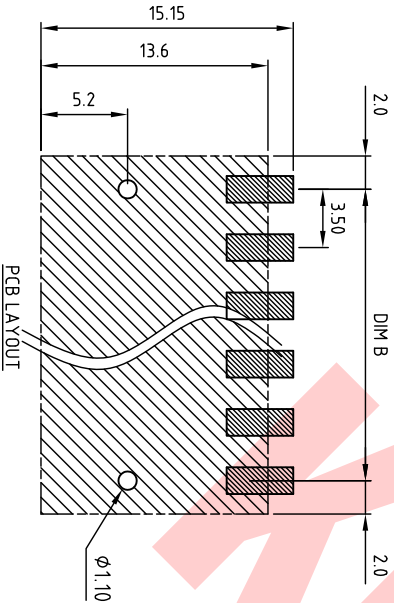

REV	SIGN	DESCRIPTION	CHK	DATE
△				

5										
4	WIRE GUARD		Stainless steel					t=0.25mm		P
3	CONTACT		BRASS					t=0.30mm, Tin PLATED		P
2	LEVEL		LCP UL94V-0					WHITE		P
1	BODY		LCP UL94V-0					BLACK		1
ITEM	NAME OF PART	MATERIAL				NOTES				QTY
DWG.	WF. Zhang	DATE	2020.09.14	UNITS:	MM	SHEET:	1 OF 1	Tolerance		
CHK.	WF. Zhang	DATE	2020.09.26	SCALE:	NONE 3:1 (.)	REV:	A	X.	±0.50	
APP.		DATE						X.XX	±0.30	
				TITLE:				X.XX	±0.10	
		PART NO.		SE-HO350-180D Series BK				X ⁺	±1 ⁺	
		DWG NO.		SE-H350-B101						



KUNUA Contact Technology Co., Ltd

<http://www.kunua.com>



KUNA Contact Technology Co, Ltd
http://www.kunacon.com