


Transfer or duplication of this document as well as the utilisation or communication of its content are not permitted unless express consent is granted. Violations give rise to claims for damages. All rights reserved in case of patent, utility model or design patent registrations.

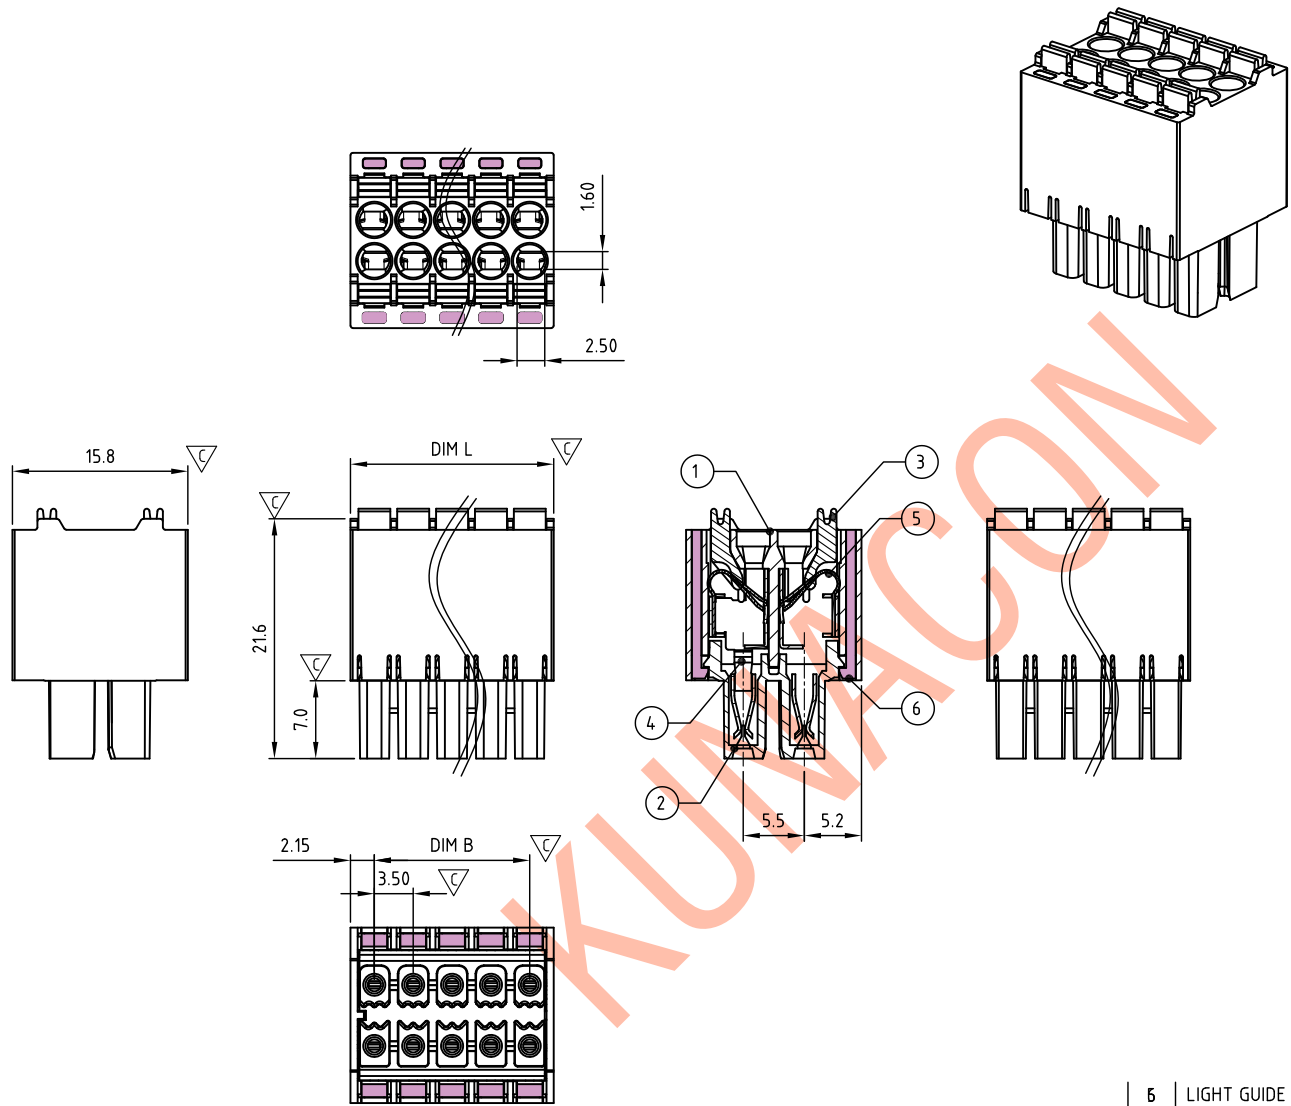

Technical data

- Nominal voltage: 300V/8A 150V/8A  
PITCH:3.5mm
- Connection capacity:  
AWG 24-16
- Insulation Withstanding Voltage:  
AC 1600V/MIN
- Insulation Resistance:  
1000MΩ or more at DC500V
- Stripping length: 9-10mm
- Using temperature range:-40C ~+15C °
- Undimensioned Tolerances:

Dim.L=(P-1)×3.5+4.3 Dim.B=(P-1)×3.5 P= 1/2 Number of poles(12-26)		
	Dim B	Dim L
0-30mm	±0.15	±0.20
over 30mm-60mm	±0.20	±0.25
over 60mm-90mm	±0.25	±0.30
over 90mm	±0.30	±0.40

- Safety approval:
- RoHS Compliance
- Critical dimension:  $\nabla$

PDSD350 xx x Axx  
① ② ③

- ① Poles 12-26(2×6P-2×13P)
- ② Color  
0 Black 5 Green .....
- ③ Custom  
A00 K MARK A0K KUNACON MARK

5	LIGHT GUIDE	PC			P
5	WIRE GUARD	Stainless steel			P
4	CONTACT	BRONZE (PhBz)	TIN PLATED		P
3	LEVEL	POM UL94HB	ORANGE		P
2	COVER	PA66 UL94V-0	ALL COLOR		1
1	BODY	PA66 UL94V-0	ALL COLOR		1
ITEM	NAME OF PART	MATERIAL	NOTES	Q'TY	
DWG.	WF. Zhang	DATE	2024.08.12	UNITS:	MM
CHK.	WF. Zhang	DATE	2024.08.12	SCALE:	NONE 2:1 ( : )
APP.		DATE		SHEET:	1 OF 1
				Tolerance	X. ±0.50
				REV.: A	X.X ±0.30
				TITLE:	plug with light guide type X.XX ±0.10
				PART NO.:	PDSD350xxxAxx X° ±1°
				DWG NO.:	PD-S350-B201

REV	SIGN	DESCRIPTION	CHK.	DATE
	△			



KUNA Contact Technology Co, Ltd  
http://www.kunacon.com